

CONVEY-ALL
INDUSTRIES INC.



HIGH CAPACITY TUBE CONVEYORS

INNOVATIVE QUALITY SOLUTIONS



1600 SERIES HIGH CAPACITY TUBE CONVEYORS

This high capacity series of conveyors use a 16" rubber, crescent top belt, inside a 10" tube. These conveyors have a running capacity of up to 6000 bu/hr.

Our conveyors have lower power requirements because of less friction, (generally 20 - 50% less).


All undercarriage are heavy duty and built to last for the life of the conveyor. Hydraulic scissor lift is standard on longer units.

Features a positive, non-slip, self-tensioning drive system.

We build our equipment very durable and efficient.

Stainless steel options are available.



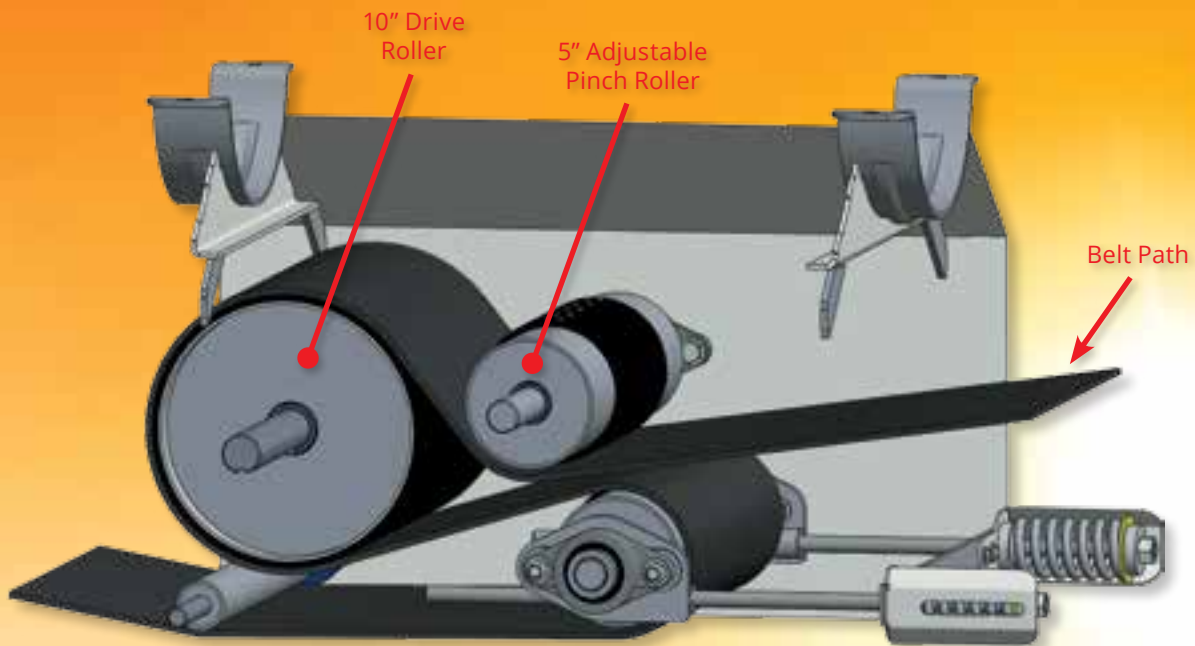

Spring Tension Pinch Drive Box, used on conveyors 52.5' and shorter

Standard Features:

- 10" x 12 and 14 Gauge Tubes
- 2 Ply Crescent Top Rubber Belt
- 16" Wide Skived Belt
- 2 Function Adjustable Discharge Hood with Electric Actuator (use on TL and SP models)
- New Tires and Wheels
- Full Length Wind Guards
- Positive Non-Slip Drive

Options:

- Gas, Diesel or Electric Motor Options
- Available End PTO or Side PTO
- Stainless Steel Option
- End Dump or Swing-Out Models
- Winch Down Collapsible Hopper
- 14" Adjustable Discharge Hood with 4 Function Electric Actuator





2200 SERIES HIGH CAPACITY TUBE CONVEYORS

Tube conveyors are available in lengths from 35' to 120'.


With a 22" rubber, crescent top belt, inside a 14" tube; this series of tube conveyor delivers up to 12,000bu/hr.

The 6" positive pinch drive box operates with ease at 650 feet per minute.

Less friction in the tube than an auger provides less product damage and lower power requirements.

Easy moving, long reaching conveyors are great for large piles or filling bunkers.



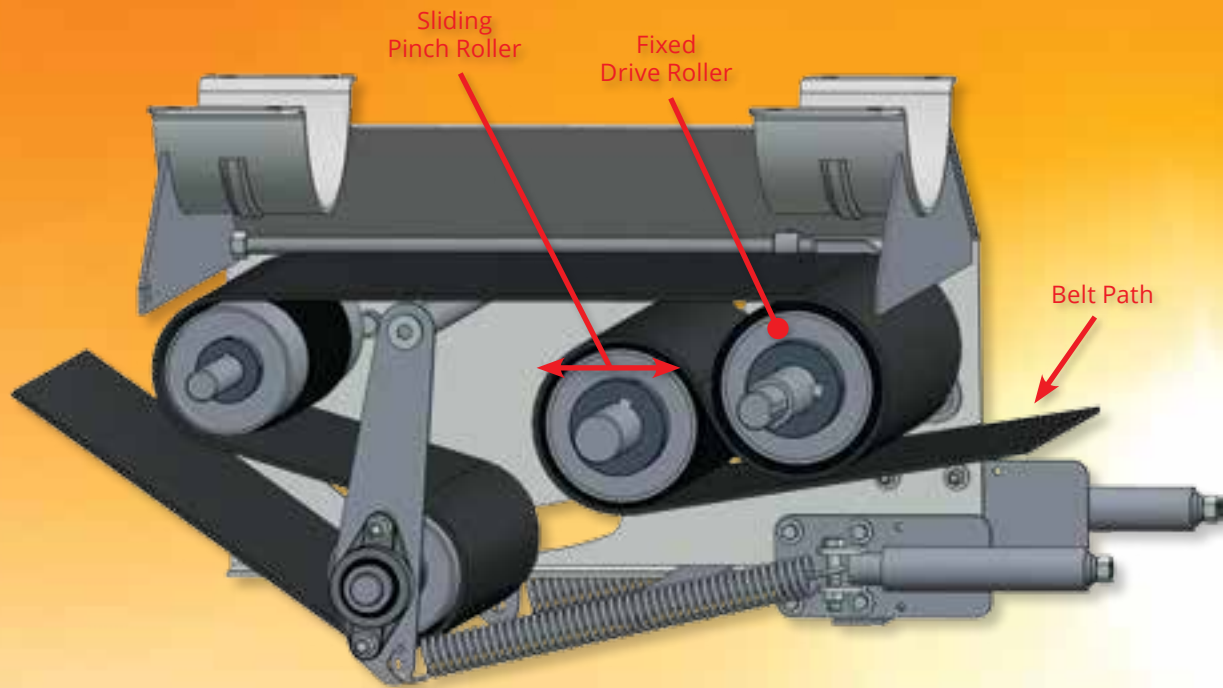

Positive Pinch Drive Box, used on conveyors 55' and longer

Standard Features:

- 14" x 12 Gauge Tubes
- 22" Wide, 2 Ply Crescent Top Rubber Belt
- New Tires and Wheels
- Positive Pinch Drive Box
- Hydraulic Scissor Lift Undercarriage

Options:


- Stainless Steel Option
- 2-5/16" Ball Receiver Hitch
- Quad-Adjust Hood Package
- Heavy Duty, Rail Car Hopper with Hold-Down Wheels (1/4" Material)
- 14" Adjustable Discharge Hood with 4 Function Electric Actuator
- Winch Down Collapsible Hopper



SPECIFICATIONS:

Model	Type of Under-Carriage	Tube Diameter	Belt Width	Axle Width	Transport Height	Transport Length
1235	A-Frame	10"	12"	7' 11"	6' 10"	24' 4"
1235-TED	A-Frame	10"	12"	7' 11"	11' 9"	37' 2"
1240-TED	A-Frame	10"	12"	7' 11"	13' 10"	41' 9"
1245	A-Frame	10"	12"	9' 2"	11' 2"	49' 2"
1235-FL	A-Frame	10"	12"	7' 11"	8' 2"	39' 10"
1245-FL	A-Frame	10"	12"	8'	14' 2"	42' 3"
1635	A-Frame	10"	16"	8'	10' 11"	40' 8"
1645	A-Frame	10"	16"	9' 1"	11' 8"	50' 10"
1635-FL	A-Frame	10"	16"	7' 11"	10' 5"	43' 7"
1645-FL	A-Frame	10"	16"	8' 4"	11' 5"	53' 7"
1655	Scissor Lift	10"	16"	11' 4"	12' 6"	60' 8"
1670	Scissor Lift	10"	16"	11' 4"	11' 10"	75' 11"
1675	Scissor Lift	10"	16"	11' 4"	12' 5"	80' 11"
1685	Scissor Lift	10"	16"	12' 6"	11' 7"	91' 1"
1690	Scissor Lift	10"	16"	12' 6"	12' 2"	96'
16100	Scissor Lift	10"	16"	13' 6"	14' 7"	105' 10"
2235	A-Frame	14"	22"	8' 4"	10' 8"	38' 8"
2245	A-Frame	14"	22"	9' 1"	11' 3"	48' 9"
2265	Scissor Lift	14"	22"	9' 1"	11' 5"	69'
2270	Scissor Lift	14"	22"	9' 1"	11' 7"	74'
2275	Scissor Lift	14"	22"	9' 1"	11' 2"	78' 11"
2285	Scissor Lift	14"	22"	13' 6"	12' 4"	89'
2290	Scissor Lift	14"	22"	13' 6"	13' 1"	93' 11"
22100	Scissor Lift	14"	22"	13' 6"	14'	103' 11"
22110	Scissor Lift	14"	22"	13' 6"	14' 6"	108' 11"
22120	Scissor Lift	14"	22"	13' 11"	15'	124'


Specifications subject to change without notice.

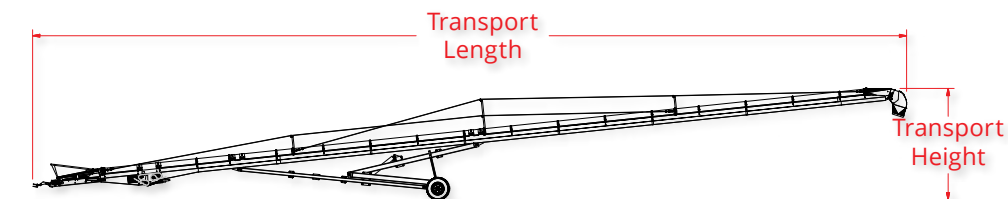

WORKING MEASUREMENTS:

Model	15°		20°		25°		30°	
	Discharge Height	Length	Discharge Height	Length	Discharge Height	Length	Discharge Height	Length
1235	n/a	n/a	11' 10"	34' 7"	14' 11"	33' 4"	17' 10"	32' 2"
1235-TED	n/a	n/a	11' 1"	33' 10"	14'	32' 11"	16' 10"	31' 10"
1240-TED	n/a	n/a	13' 11"	38' 7"	17' 11"	37' 6"	21' 2"	35' 11"
1245	11' 5"	44' 7"	15' 5"	43' 7"	19' 3"	42' 4"	23'	40' 8"
1235-FL	n/a	n/a	10' 3"	33' 11"	13' 5"	33'	16' 6"	31' 10"
1245-FL	n/a	n/a	n/a	n/a	18'	42' 3"	21' 10"	40' 8"
1635	n/a	n/a	12'	37' 1"	15' 1"	35' 10"	18' 1"	34' 5"
1645	10' 10"	45' 6"	14' 11"	44' 7"	18' 11"	43' 5"	22' 9"	41' 10"
1635-FL	n/a	n/a	10' 7"	37' 2"	14' 1"	36' 2"	17' 5"	35'
1645-FL	n/a	n/a	10' 5"	30' 7"	13' 3"	29' 10"	15' 11"	28' 10"
1655	13' 5"	5' 2"	18' 4"	54'	23' 2"	52' 5"	27' 9"	50' 6"
1670	17' 4"	69' 8"	23' 6"	68' 1"	39' 6"	66' 1"	35' 3"	63' 6"
1675	18' 7"	74' 6"	25' 2"	72' 10"	31' 7"	70' 7"	37' 9"	67' 10"
1685	21' 2"	84' 2"	28' 7"	82' 3"	35' 10"	79' 8"	42' 9"	76' 6"
1690	22' 6"	89'	30' 4"	86' 11"	37' 11"	84' 2"	45' 3"	80' 10"
16100	25' 1"	98' 8"	33' 9"	96' 4"	42' 2"	93' 3"	50' 3"	89' 6"
2235	n/a	n/a	10' 11"	33' 6"	13' 11"	32' 8"	16' 9"	31' 7"
2245	10' 5"	43' 8"	14' 3"	42' 10"	18' 1"	41' 8"	21' 9"	40' 2"
2265	15' 6"	63'	21' 1"	61' 8"	26' 5"	59' 10"	31' 7"	57' 7"
2270	16' 10"	67' 10"	22' 9"	66' 4"	28' 6"	64' 4"	34' 1"	61' 11"
2275	18' 1"	72' 8"	24' 6"	71' 1"	30' 8"	68' 11"	36' 7"	66' 3"
2285	20' 9"	82' 4"	28'	80' 5"	35'	77' 11"	41' 9"	74' 10"
2290	22' 7"	87' 2"	30' 1"	85' 2"	37' 5"	82' 5"	44' 6"	79' 2"
22100	25'	96' 10"	33' 6"	94' 6"	41' 8"	91' 6"	49' 6"	87' 10"
22110	26' 5"	101' 8"	35' 3"	99' 3"	43' 9"	96'	52'	92' 2"
22120	29' 10"	116' 2"	40'	113' 4"	49' 10"	109' 8"	59' 4"	105' 2"

Measurements subject to change without notice.

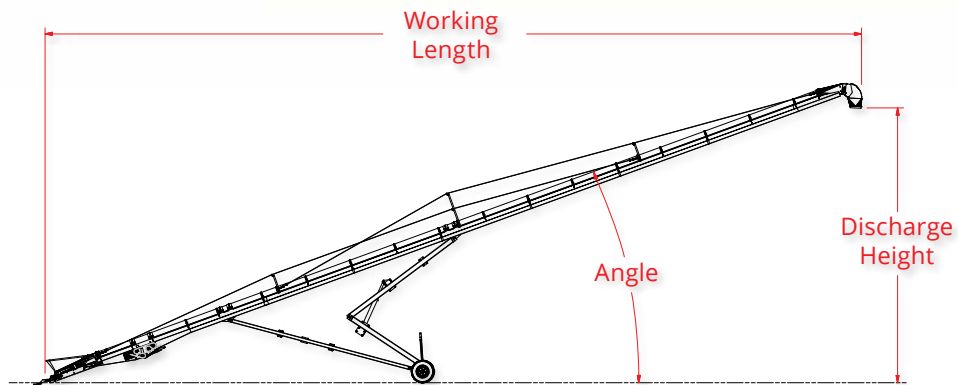



A Convey-All Commercial Seed Tender feeds our 1690 Tube Conveyor, to fill the bin.
A Convey-All Open Bed Conveyor below the row of bins, will unload product, into our Paddle Belt Conveyor, and to our Scale Tower.
Convey-All is the logical choice for your delicate/specialty seed operation!



**CONVEY-ALL
INDUSTRIES INC.**

INNOVATIVE QUALITY
SOLUTIONS

130 CANADA STREET
WINKLER MANITOBA R6W 0J3
CANADA
1.800.418.9461
P: 204.325.4195 F: 204.325.8116
convey-all.com